

UD LED Power Driver, Long Life

LED 电源驱动, 长寿命




- 105°C, 6000 hours assured, LED Power Driver.
105°C, 负荷寿命 6000 小时 LED 电源适配器品。
- Case diameter $\Phi 8\text{mm} \sim \Phi 10\text{mm}$.
产品直径 $\Phi 8\text{mm} \sim \Phi 10\text{mm}$.
- Available for high density surface mounting.
适用于高密度表面组装。
- High stability and reliability.
性能稳定, 可靠性高。

Specifications 特性表

Items 项目	Characteristics 主要特性																					
Rated Voltage Range 额定工作电压范围	160 ~ 450V _{dc}																					
Category Temperature Range 使用温度范围	-40 ~ +105°C																					
Capacitance Tolerance 静电容量允许偏差	±20% (M), at 20°C, 120Hz																					
Leakage Current 漏电流, 20°C 环境下施加工作电压 2 分钟后. (at 20°C, After 2 minutes)	I ≤ 0.04CV + 100uA Where, I : Max. leakage current (漏电流, μA), C : Nominal capacitance (静电容量, μF), V : Rated voltage (额定电压 V)																					
Dissipation Factor (Tanδ, at 20°C, 120Hz) 损耗角正切值 (测试条件为 20°C, 120Hz)	<table border="1"> <tr> <td>Rated voltage (V) 额定工作电压</td> <td>160</td> <td>200</td> <td>250</td> <td>400</td> <td>450</td> <td>500</td> </tr> <tr> <td>Tanδ (Max.) 最大损耗角正切</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> <td>0.25</td> <td>0.30</td> <td>0.30</td> </tr> </table> <p>When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. 静电容量大于1000uF, 每增加1000uF, 损耗角正切增加0.02</p>	Rated voltage (V) 额定工作电压	160	200	250	400	450	500	Tanδ (Max.) 最大损耗角正切	0.20	0.20	0.25	0.25	0.30	0.30							
Rated voltage (V) 额定工作电压	160	200	250	400	450	500																
Tanδ (Max.) 最大损耗角正切	0.20	0.20	0.25	0.25	0.30	0.30																
Low Temperature Characteristics (Max. Impedance Ratio, 120Hz) 低温特性最大阻抗比	<table border="1"> <tr> <td>Rated voltage (V) 额定工作电压</td> <td>160</td> <td>200</td> <td>250</td> <td>400</td> <td>450</td> <td>500</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>6</td> <td>6</td> <td>10</td> <td>10</td> <td>12</td> <td>12</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>8</td> <td>12</td> <td>121</td> <td>15</td> <td>15</td> </tr> </table>	Rated voltage (V) 额定工作电压	160	200	250	400	450	500	Z(-25°C)/Z(20°C)	6	6	10	10	12	12	Z(-40°C)/Z(20°C)	8	8	12	121	15	15
Rated voltage (V) 额定工作电压	160	200	250	400	450	500																
Z(-25°C)/Z(20°C)	6	6	10	10	12	12																
Z(-40°C)/Z(20°C)	8	8	12	121	15	15																
Endurance 耐久性	<p>The following specification shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the ripple current is applied for the specified period of time at 105°C. 在 105°C 环境中, 不超过额定电压的范围内叠加额定纹波电流, 连续加载规定时间的额定电压后, 待温度恢复到 20°C 进行测量时, 应满足以下要求。</p> <table border="1"> <tr> <td>Test Time 测试时间</td> <td>6,000Hrs</td> </tr> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within ±30% initial value 初始值的±30%以内</td> </tr> <tr> <td>Dissipation Factor 损耗角正切</td> <td>≤300% of specified value 不大于规范值的 300%</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>≤The initial specified value 不大于规范值</td> </tr> </table>	Test Time 测试时间	6,000Hrs	Capacitance Change 静电容量变化率	Within ±30% initial value 初始值的±30%以内	Dissipation Factor 损耗角正切	≤300% of specified value 不大于规范值的 300%	Leakage Current 漏电流	≤The initial specified value 不大于规范值													
Test Time 测试时间	6,000Hrs																					
Capacitance Change 静电容量变化率	Within ±30% initial value 初始值的±30%以内																					
Dissipation Factor 损耗角正切	≤300% of specified value 不大于规范值的 300%																					
Leakage Current 漏电流	≤The initial specified value 不大于规范值																					
Shelf Life 高温贮存	<p>The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of IEC 60384-4. 在 105°C 环境中, 无负荷放置 1,000 小时后待温度恢复到 20°C, 进行试验前处理(IEC 60384-4 4.1 项)后进行测量时, 应满足以下要求。</p> <table border="1"> <tr> <td>Capacitance Change 静电容量变化率</td> <td>Within ±30% initial value 初始值的±30%以内</td> </tr> <tr> <td>Dissipation Factor 损耗角正切值</td> <td>≤300% of specified value 不大于规范值的 300%</td> </tr> <tr> <td>Leakage Current 漏电流</td> <td>≤300% of specified value 不大于规范值的 300%</td> </tr> </table>	Capacitance Change 静电容量变化率	Within ±30% initial value 初始值的±30%以内	Dissipation Factor 损耗角正切值	≤300% of specified value 不大于规范值的 300%	Leakage Current 漏电流	≤300% of specified value 不大于规范值的 300%															
Capacitance Change 静电容量变化率	Within ±30% initial value 初始值的±30%以内																					
Dissipation Factor 损耗角正切值	≤300% of specified value 不大于规范值的 300%																					
Leakage Current 漏电流	≤300% of specified value 不大于规范值的 300%																					

Drawing(Unit: mm) 外形图

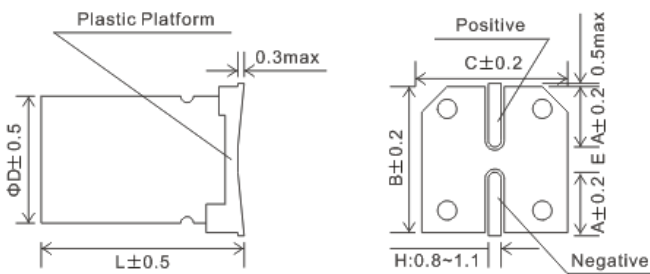

Case size 产品尺寸	A	B	C	E	L	H
Φ8x13.5	2.9	8.3	8.3	3.1	10.2	0.8~1.1
Φ10x10.2	3.2	10.3	10.3	4.5	10.2	0.8~1.1
Φ10x13.5	3.2	10.3	10.3	4.5	13.5	0.8~1.1

Rated ripple current multipliers(Unit: mm) 额定纹波修正系数

Frequency 频率 (Hz)	60Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系数	0.80	1.00	1.25	1.40	1.60

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

铝电解电容器由于在纹波电流叠加时自我发热、温度上升而老化, 每升温 5°C 寿命减少一半。要想保持长寿命请在使用过程中降低纹波电流。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, Please contact us immediately for technical assistance before purchase.

注: 以上所提供的设计及特性参数仅供参考, 任何修改不作预先通知, 如有使用上任何疑问, 请在采购前与我们联系, 以便提供技术上的协助。

UD Series

■ Standard ratings 标准品一览表

WV μF	160		200		250		400		450		500	
	ΦD x L	R.C.	ΦD x L	R.C.	ΦD x L	R.C.	ΦD x L	R.C.	ΦD x L	R.C.	ΦD x L	R.C.
1									8x10	15		
1.5							8x10	12	8x10	18		
2.2							8x10	15	8x10	20	10x10	25
3.3							8x10	20	10x10	25	10x13.5	35
4.7							10x10	35	10x13.5	40		
5.6							10x13.5	45	10x13.5	50		
6.8	8x10	30					10x13.5	50	10x13.5	55		
8.2					8x10	35						
10	10x10	50			10x10	45						
12			10x10	45	10x10	50						
15	10x10	55	10x13.5	60	10x13.5	70						
22	10x13.5	65										

Note1: Case size ΦD x L(mm), ripple current (mA, rms) at 105°C, 120Hz. 尺寸 ΦD x L(mm), 纹波电流於 105°C, 120Hz

Note2: Produce custom product too, which are not found in these tables. 客户定制品不在标准品一览表内